

AIR VIBRATORS

PERFORMANCE

FORCE lb. (IN.LB.)³

MODEL*	MAX. RPM ¹	1	2*	3	4	5	6	7	MAX PSI.	MAX CFM	dB ²
AA4-3300	4500	1150(2.0)	1350(2.4)	1650(2.9)	1950(3.4)	2250(3.9)	2550(4.4)	3300(5.8)	80	50	90
AC4-3000	4600	1550(2.6)	1800(3.0)	2150(3.6)	2400(4.0)	2750(4.6)	3000(5.0)		80	48.4	95
AC3-3500	3500	1800(5.2)	2100(6.0)	2500(7.2)	2800(8.1)	3200(9.2)	3500(10.1)		80	50	97
AL4-3000	4600	1550(2.6)	1800(3.0)	2150(3.6)	2400(4.0)	2750(4.6)	3000(5.0)		80	48.4	95
AL3-3500	3500	1800(5.2)	2100(6.0)	2500(7.2)	2800(8.1)	3200(9.2)	3500(10.1)		80	50	97
AA15-2600	15000							2697(.42)	80	41.3	94
AC15-2600	15000							2697(.42)	80	41.3	94
AC11-5000	11295							5000(1.4)	87	40	90
AC11-6500	11295							6500(1.8)	80	62	110

• Standard settings.

1) RPM varies with air flow.

2) Sound produced in decibels - decibel reading taken with the vibrator mounted on a 400 lb. plate at a distance of 3 ft. from dB meter - A scale - slow response. (Caution: Above 85 dB use ear protection.)

3) Force outputs calculated at RPM listed, but a higher RPM may be acceptable if the vibrator weights are set on a lower setting. You may contact your dealer, or factory for the bearing life at higher speeds. (Note: for models AC3-3500 and AL3-3500, the RPM listed is the maximum RPM for all weight settings.)

* AA4-3300, AA15-2600 has mounting bolts and compression washers included.

AA4-3300 has drilled and tapped hole for safety cable.

DIMENSIONS

Bolt Pattern

Bolt Size /QTY


Ports⁴ npt

Weight/lb.


MODEL ⁵	A	B	C	D	E	F	G	H	I	J	Weight/lb.
AA4-3300	10 5/16"	6 5/8"	10"	3 1/2"	8"	1"	3 15/16"	3"	5/8" x 1 3/4" / 2	3/8"	44 lb.
AC4-3000	12"	10 5/16"	9 1/2"			3 7/8"	3 15/16"	4 1/16"		3/8"	47 lb.
AC3-3500	12"	10 5/16"	9 1/2"			3 7/8"	3 15/16"	4 1/16"		3/8"	50 lb.
AL4-3000	12"	10 1/2"	8 3/8"	1 1/4"		5"	3 15/16"	4 1/16"		3/8"	57 lb.
AL3-3500	12"	10 1/2"	8 3/8"	1 1/4"		5"	3 15/16"	4 1/16"		3/8"	63 lb.
AA15-2600	6 11/16"	4 7/8"	9"	3 7/8"	7"	1/2"			5/8" x 1" / 2		23 lb.
AC15-2600	6 3/4"	4 13/16"	6 13/16"			2 5/8"		2 5/8"			17 lb.
AC11-5000	8"	9 1/16"	9 1/2"			3 15/16"	1 1/4"	3"			35 lb.
AC11-6500	8"	9 1/16"	9 1/2"			3 15/16"	1 1/4"	3"			35 lb.

4) Models AA15-2600, AC15-2600, AC11-5000 and AC11-6500 have 5/8" hose fitting included.


5) Cradle mount vibrator: AC4-3000, AC3-3500, AC11-5000, AC11-6500, and AC15-2600.

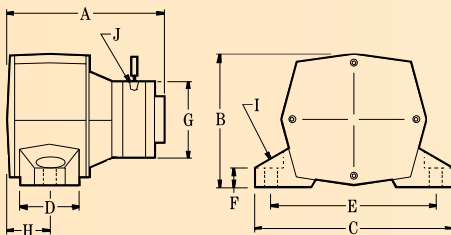


AA4-3300

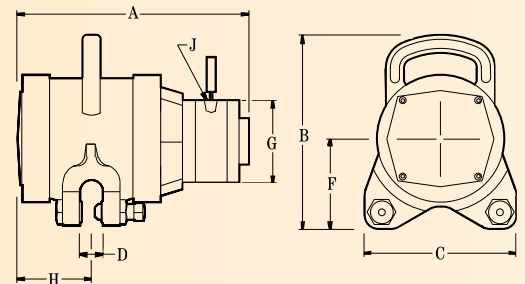


AL4-3000 AL3-3500

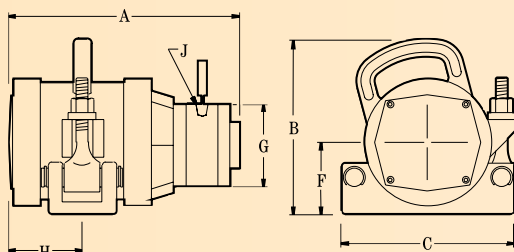


AC4-3000 AC3-3500

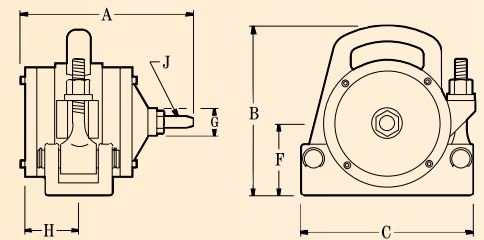

AC11-5000 AC11-6500

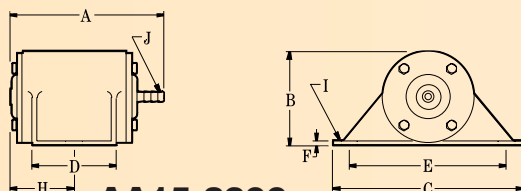

AA15-2600

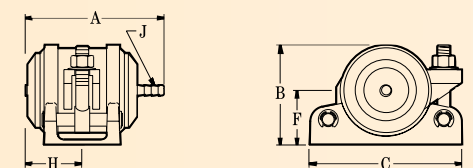

AC15-2600