


The **GO-E2** is a beam-mount with rolling carriage, heavy duty, pendant controlled, Electric Powered Hopper Car Gate Opener with telescoping driveshaft (TDS). This Opener is well suited for worksites in which: (1) Private or fleet controlled railcars are well maintained and regularly repaired; (2) Compressed air is not available or limited; (3) Railcars are always in the easy to moderately-difficult to open range; (4) Railcars received have both fixed and traveling gate mechanisms; (5) Trackside walkway / platform is wide and unobstructed.

The **GO-E2** is a 5-Hp Opener which runs at a constant speed of 34-RPM, and generates 2000 ft-lbs of torque at 230/460VAC/3PH/60HZ.

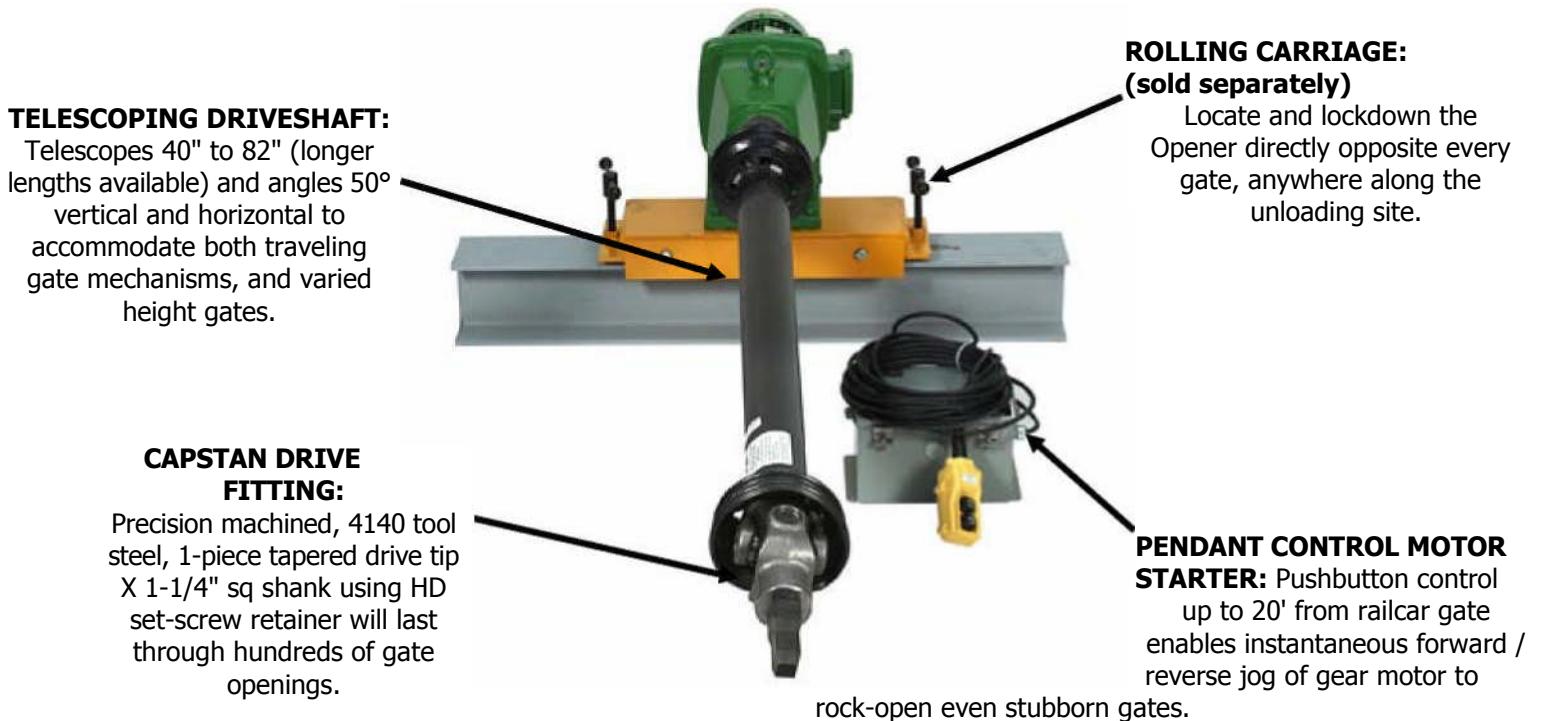

1-WORKER POSITIONING AND OPERATION

To enable greater productivity and reduced man-power planning.

EASY-LIFT, MANUAL HEIGHT ADJUSTMENT

To easily compensate for differing height gates, or variations in unloading site docks or platforms.

OPERATES AT 66 dBA – To accommodate noise restrictions at plant and unloading site operations.

ECONOMICAL TO PURCHASE – To meet even the tightest budget when an electric powered Gate Opener is required.

x **INVERTER DUTY 5-HP MOTOR** – To provide high start / stop capacity, and long service life in a compact energy-efficient design.

x **HIGH QUALITY GEARING** – To provide low noise, low maintenance and high durability. Manufactured to AGMA Class 3 standards allows 275% momentary overload capacity.

x **HEAVY DUTY, CUSTOM TELESCOPING DRIVE SHAFT** – To meet the high torque, long life and ease of maintenance requirements of a Hopper Car Gate Opener.

GO-E2

WORKMASTER GATE OPENER SPECIFICATIONS

Model:	GO-E2 Beam Mounted Gate Opener w/ telescoping driveshaft
Power:	230/460VAC/3PH/60Hz
Working Torque:	2000 Ft Lbs
Mount Assembly:	Beam Mount: Fixed Position or Rolling Carriage
Dimensions:	Motor: 24"W x 26"L x 13"H; TDS: 40" compressed to 82" extended
Height Adjustment:	TDS Lift-on to accommodate any capstan height
Finish Coating:	Acrylic Enamel over Polyurethane
Included Accessories:	(1) Drive Fitting; (1) Manual
Gate Opener Weight:	Motor: 150 Lbs; TDS: 68 Lbs; Control Pkg: 21 Lbs
Shipping Weight:	350 Lbs



ChicagoVibratorProducts

Flow and Compaction

1-800-842-7284

1-630-920-9411 Outside US & Canada

www.chicagovibrator.com