


VBB Series

Base mount (2 bolt) with side body inlet/exhaust ports (NPT) and rugged construction make the VBB series ideal for permanent mount in harsh environments which require high frequency, moderate force.

PERFORMANCE DATA										
MODEL	FREQUENCY			OUTPUT FORCE			AIR CONSUMPTION			WEIGHT
	30 PSI VPM	60 PSI VPM	90 PSI VPM	30 PSI LBS	60 PSI LBS	90 PSI LBS	30 PSI CFM	60 PSI CFM	90 PSI CFM	
VBB-190	12000	16000	19300	132	236	350	5	8	13	26 oz.
VBB-250	8500	12500	15000	201	383	610	7	13	18	2.6 lbs.

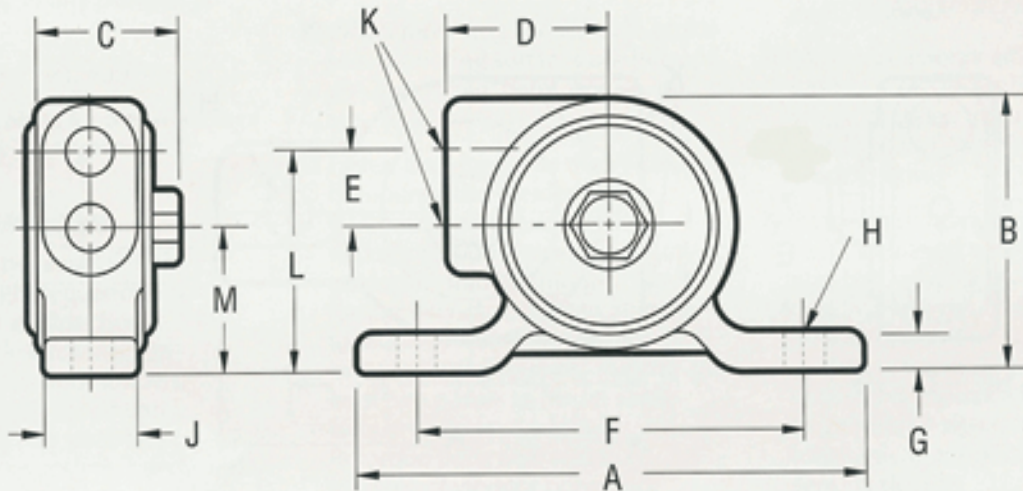

DIMENSIONS												
MODEL	A	B	C	D	E	F	G	H*	J	K**	L	M
VBB-190	5.13	3.13	1.72	1.75	0.81	34	0.75	0.36	1.25	1/4" NPT	2.44	1.75
VBB-250	5.25	4.25	2.25	2.25	1.13	4	0.5	0.5	1.75	1/4" NPT	3.63	2.5

* Bolt Size

** Pipe Tap Size

CHICAGO VIBRATOR PRODUCTS 800-842-7284 USA & CANADA
800-920-9411 ALL OTHERS